

## Specification Sheet

# LCMS-2020

Liquid Chromatograph Mass Spectrometer




### UFsensitivity

Ultra-fast analysis with excellent sensitivity  
Newly developed ion optical system and new Qarray provide excellent sensitivity, repeatability and linearity.

### UFswitching and UFscanning

UFswitching and UFscanning functions make ultra-fast MS measurement possible.

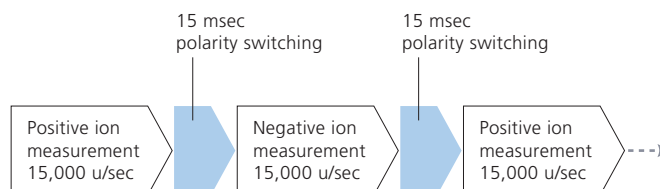

## Performance

Mass Range:	<i>m/z</i> 10 to 2000
Resolution:	R=2M
Max. Scan Speed:	15,000 u/sec
Polarity Switching Time:	15 msec
Max. Temperature of Desolvation Line:	300°C
Max. Temperature of Block Heater:	500°C (ESI, DUIS) / 300°C (APCI)
Interface:	ESI, APCI (Option), DUIS (Option)
Applicable Flow Rate:	0.001–2 mL/min (ESI) 0.05–2 mL/min (APCI) 0.05–1 mL/min (DUIS)

### Sensitivity:

Interface \ Polarity	Positive	Negative
ESI	S/N > 1500 RMS (S/N > 600 peak-to-zero)	S/N > 150 RMS (S/N > 60 peak-to-zero)
	10 pg reserpine	20 pg <i>p</i> -nitrophenol
APCI	S/N > 1000 RMS (S/N > 400 peak-to-zero)	S/N > 250 RMS (S/N > 100 peak-to-zero)
	10 pg reserpine	20 pg <i>p</i> -nitrophenol
DUIS	S/N > 1500 RMS (S/N > 600 peak-to-zero)	S/N > 50 RMS (S/N > 20 peak-to-zero)
	10 pg papaverine	20 pg <i>p</i> -nitrophenol
	S/N > 500 RMS (S/N > 200 peak-to-zero)	
	10 ng acetophenone	


\*Sensitivities are measured using flow injection analysis.

## Software

[LabSolutions LCMS Ver.5]

- Operating System: Compatible with Windows 7 Professional / Vista Business / Windows XP Professional
- Instrument Control: Integrated control of the UHPLC Nexera™, HPLC (Shimadzu Prominence Series and LC-2010), LCMS-2020 MS unit, and interface
- Multi-Sequence Mode Function: Simultaneous data collection with a maximum 64 methods, such as scan, SIM, profile, positive ion, negative ion, CID switching
- Autotuning: Sensitivity and resolution optimized for both positive-ion and negative-ion modes

## Installation Example

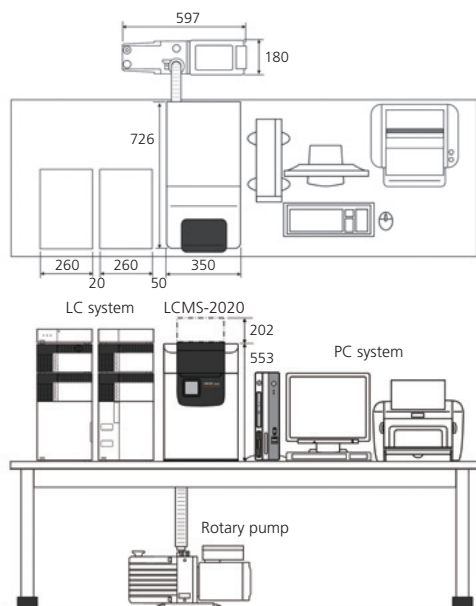

- Temperature: 18°C to 28°C  
Humidity: 40% to 70% (no condensation)
- Size: 350 mm (W) × 726 mm (D) × 553 mm (H)
- Weight: 77.5 kg (MS unit)
- Power supply: MS unit: 200/230 V AC, 10 A (50/60 Hz), single-phase  
PC unit: 100/120/220 V AC (50/60 Hz)  
LC unit: 100/120/220 V AC  
(current capacity varies with system configuration)
- Gas: Nitrogen gas,  
consumption rate max. 21.5 L/minute

Size and weight of PC / Printer vary according to models.  
Appearance and Specifications are subject to change without notation of modification.



Shimadzu Corporation  
[www.shimadzu.com/an/](http://www.shimadzu.com/an/)

Company names, product/service names and logos used in this publication are trademarks and trade names of Shimadzu Corporation or its affiliates, whether or not they are used with trademark symbol "TM" or "®". Third-party trademarks and trade names may be used in this publication to refer to either the entities or their products/services. Shimadzu disclaims any proprietary interest in trademarks and trade names other than its own.

Shimadzu does not assume any responsibility or liability for any damage, whether direct or indirect, relating to the use of this publication. The contents of this publication are subject to change without notice.